


# RDN6

Differential pressure switch with intrinsic safety for variable static pressure

RDN-6###.##

## Overview

- Excellent repeatability
- Dead band adjustment for regulation
- Fix dead band for control
- Static pressure max. 20 bar
- No influence of the static pressure on the setpoint

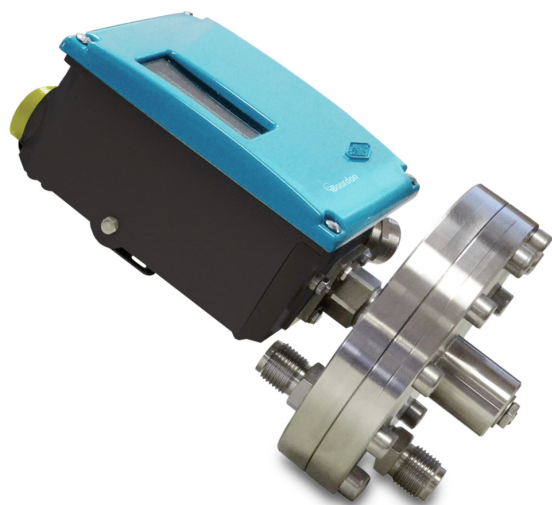

Picture similar

## Technical data

### Housing

Protection rating (EN60529)	IP66
Cover	Blue painted, zamak Captive stainless steel screws
Case material	Black painted, zamak
Mounting	Wall mounting bracket
Scale	Internal, accuracy on reading $\pm 5\%$ FS

### Process

Process connection	G1/4" female, only for codes 161, 162, 163 G1/2" 1/4" NPT female 1/2" NPT
Process connection material	Stainless steel 1.4404 / AISI 316L

### Temperature

Ambient temperature	-25°C ... +55°C
Storage temperature	-40°C ... +70°C
Media temperature	-15°C ... +150°C

## Remarks

- These devices must be used as instruments that provide electrical information according to the value of the input variable. They are not intended to be used as a safety accessory. It is the responsibility of the user to check the compatibility of the device with its intended use.

### Wetted parts

Flange	Stainless steel 1.4404 / AISI 316L
Diaphragm	FKM (Viton)

### Sensing / Input

Min. measuring range	10 ... 200 mbar
Max. measuring range	10 ... 2000 mbar

### Performance

Repeatability	$\pm 1\%$ FS
Adjustment	2 external adjustment screws on top of the case for set point and deadband The adjustment is not influenced by changes of the static pressure

### Electrical data

Ground connection	Via internal terminal block
Electrical connection	Via internal terminal block with plastic cable gland for $\varnothing 7$ to 10.5 mm

### Approval / Conformities







CE conformity	Low Voltage Directive 2014/35/UE
---------------	----------------------------------

# RDN6

Differential pressure switch with intrinsic safety for variable static pressure

RDN-6###.##


## Dimensional drawings (mm)

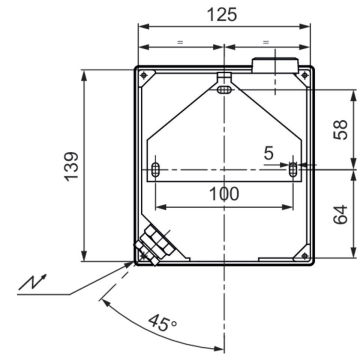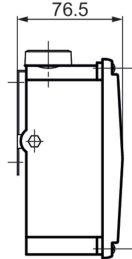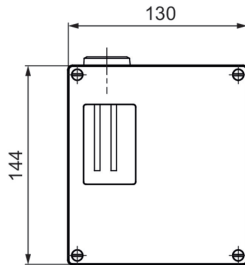


Pressure range codes: 161 - 162 - 163  
Weight: 7 kg

Pressure range codes: 156 - 157 - 158  
Weight: 6.6 kg

## Electrical connection







1 SPDT

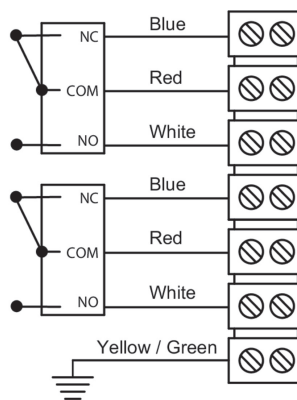

2 SPDT

## Principle

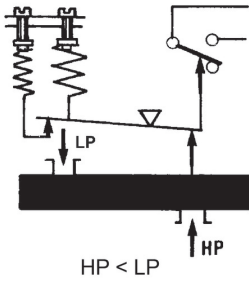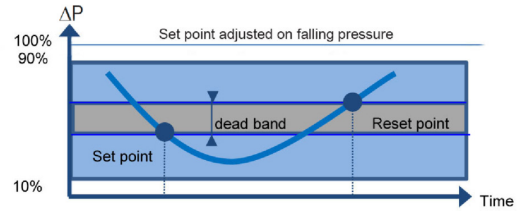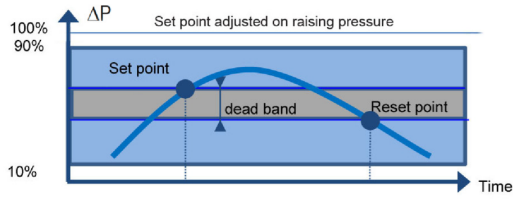

A flexible sensing element actuates a microswitch by means of a piston. The set point is adjusted by means of a compressible spring installed in opposition.

Set point and reset point must be between 10% and 90% of the selected scale.

Standard factory adjustment

Setpoint at 50% of the scale on falling pressure.

Customer specific factory adjustment (option SETP)

The following specifications have to be given with the order:

- Setpoint value
- Adjustment on falling or raising pressure
- Static pressure (except RDx6)
- Dead band value (as needed) when using an adjustable dead band switch

# RDN6

Differential pressure switch with intrinsic safety for variable static pressure

RDN-6###

## Adjustable ranges

Scale	Max ΔP	Max P Static	Code	Micro-switch dead band <sup>1)</sup>									
				Adjustable dead band				Fixed dead band					
				A (B*)		M (K*)		C (W*)		E (F*)		H D (V*) J	
				10%	90%	10%	90%	10%	90%	10%	90%		
mbar	mbar	bar		mbar									
10 ... 200	200	20	156	8 - 80	10.5 - 80	35 - 80	45 - 80	2.5	3.4	10	13		
10 ... 400	400	20	157	15 - 150	20 - 150	40 - 150	50 - 150	4.5	6	18	24		
10 ... 1000	1000	20	158	18 - 150	22 - 150	45 - 150	60 - 150	5	7	22	26.5		
10 ... 700	700	20	161**	30 - 250	45 - 250	130 - 450	150 - 450	13	15	36	54		
10 ... 1500	1500	20	162**	30 - 300	45 - 300	130 - 450	150 - 450	13	15	36	54		
10 ... 2000	2000	20	163**	45 - 300	90 - 300	180 - 450	300 - 450	18	25	54	108		

(\*) For version with 2 microswitches lower values of the dead band must be multiplied x 1.5

(\*\*) G1/4 female only

(1) The value of the dead band is depending on the value of the set point. This table contains the dead band values for set point adjustment at 10% and 90% of the selected scale. For adjustable dead band the lower value corresponds to the dead band spring totally released and the higher corresponds to the dead band spring fully tensed. For other set points the dead band value can be calculated by linear interpolation between the values at 10% and 90%.

## Micro switch characteristics

Switch code	A (B)	M (K)	C (W)	E (F)	H	D (V)	J
Type	Standard	Gold contact	Hermetic	Ultra sensitive	Manual reset	Ultra sensitive Hermetic	Manual reset
6 Vdc	0.4... 10 A	10... 50 mA	5 mA ... 4 A	0.4... 1 A	N/A	0.4... 4 A	N/A
12 Vdc	0.4... 10 A	10... 50 mA	5 mA ... 4 A	0.4... 1 A	N/A	0.4... 4 A	N/A
24 Vdc	0.4... 6 A	10... 50 mA	5 mA ... 4 A	0.4... 1 A	0.1... 8 A	0.4... 4 A	0.1... 8 A
30 Vdc	0.4... 6 A	10... 50 mA	5 mA ... 3 A	0.4... 1 A	0.1... 8 A	0.4... 2 A	0.1... 8 A
48 Vdc	0.4... 6 A	10... 50 mA	5 mA ... 3 A	N/A	N/A	N/A	N/A
110 Vdc	0.1... 0.5 A	10... 50 mA	5 mA ... 1 A	N/A	N/A	N/A	N/A
220 Vdc	0.1... 0.25 A	10... 50 mA	5 mA ... 0.5 A	N/A	N/A	N/A	N/A
115 Vac	0.4... 10 A	10... 50 mA	50 mA ... 3 A	0.4... 10 A	0.1... 10 A	N/A	0.1... 10 A
250 Vac	0.2... 10 A	N/A	50 mA ... 2.5 A	0.2 ... 10 A	0.1... 5 A	N/A	0.1... 5 A
Dielectric rigidity between contacts and ground	2000 V	2000 V	1500 V	2000 V	2000 V	1000 V	2000 V

# RDN6

Differential pressure switch with intrinsic safety for variable static pressure

RDN-6###.##

## Ordering reference

Ordering key - Configuration possibilities see website

	RDN	-	6	#	#	.	###
<b>Product</b>	RDN						
<b>Measuring element</b>	Membran, Viton® (≤ 2 bar)		6				
<b>Type of Microswitch</b>	1 gold contact changeover switch				M		
	1xSPDT, Standard				A		
	simultaneous				B		
	1xSPDT, hermetically				C		
	1xSPDT hermetic/ultra sensit.?				D		
	1xSPDT, ultra sensitive				E		
	simultaneous				F		
	1xSPDT, manually, falling				H		
	1xSPDT, manually, rising				J		
	simultaneous				K		
	simultaneous				V		
	simultaneous				W		
<b>Process connection</b>	G 1/2						3
	1/2 NPT						6
	1/4 NPT F						8
	G 1/4 Internal Screw						H
<b>Pressure range</b>	10 ... 200 mbar						156
	10 ... 400 mbar						157
	10 ... 1000 mbar						158
	10 ... 700 mbar						161
	10 ... 1500 mbar						162
	10 ... 2000 mbar						163

## Ordering example

	RDN	-	6	A	3	.	161	0765
<b>Product</b>	RDN							
<b>Measuring element</b>	Membran, Viton® (≤ 2 bar)		6					
<b>Type of Microswitch</b>	1xSPDT, Standard			A				
<b>Process connection</b>	G 1/2						3	
<b>Pressure range</b>	10 ... 700 mbar							161
<b>Cleanliness</b>	for oxygen applications free of oil and grease							0765

## RDN6

Differential pressure switch with intrinsic safety for variable static pressure

RDN-6###.##

### Options

Setpoint factory adjusted	SETP	Souriau connection	2298
For oxygen applications	0765	2.1 Certificate	Q001
Mounting on 2 pipe	0407	2.2 Certificate	Q002
stainless steel label wired*	9941	3.1 Material certificate	Q003
Setpoint adjust. lead sealed	8990	3.1 Certif. setpoints adjust.	Q011
Souriau mobile plug	2249		