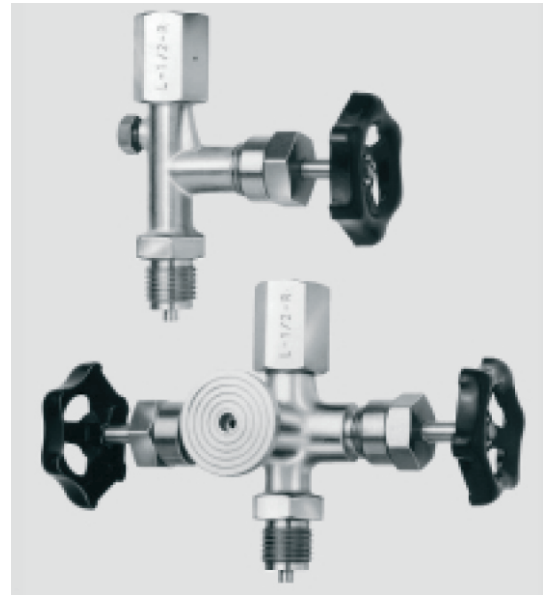


Shut-Off Valves

Application For liquids, gases or vapours at high operating pressure and temperatures

Materials Brass
 Chrome-plated brass
 Steel
 Stainless steel


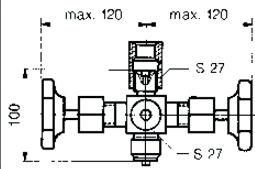
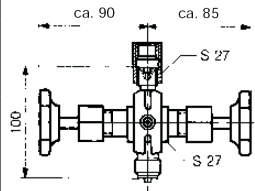


Execution Standardized according to
 DIN 16270, 16271, 16272
 and with or without test-connection



Selection Chart without test-connection

Dimensions	Connections		Operational data		Material	Order Number
	Entry	Exit	Pressure bar	Temp. °C		
<p>DIN 16270 - AG</p>	Tappet connection G 1/2	Clamp muff connection G 1/2	250	120	Brass with steel muff	N 05008.0000
			250	120	Chrome-plated brass	N 05008.0001
			400	120	Steel	N 05008.0002
			400	120	Stainless steel	N 05008.0003
<p>for fine regulation</p>	Tappet connection G 1/2	Clamp muff connection G 1/2	250	120	Brass	D 11730.0000
<p>similar to DIN 16270</p>	Tappet connection G 3/8	Clamp muff connection G 3/8	250	120	Brass with steel muff	D 07728.0000
			250	120	Chrome-plated brass	D 07728.0001
			600	120	Steel	D 07728.0002

Selection Chart with test-connection

Dimensions	Connections		Operational data		Material	Order Number
	Entry	Exit	Pressure bar	Temp. °C		
with test-cone M20 x 1,5  DIN 16271 - AG	Tappet connection G 1/2	Clamp muff connection G 1/2	250	120	Brass	N 05009.0000
			400	120	Steel	N 05009.0002
			400	120	Stainless steel	N 05009.0003
with test-cone M20 x 1,5  DIN 16272 - AG	Tappet connection G 1/2	Clamp muff connection G 1/2	250	120	Brass	N 05010.0000
			400	120	Steel	N 05010.0002
			400	120	Stainless steel	N 05010.0003
with test-flange 60 x 25 x 10 	Tappet connection G 1/2	Clamp muff connection G 1/2	250	120	Brass	D 11731.0000
			400	120	Steel	D 11731.0002
			400	120	Stainless steel	D 11731.0003
with test-flange SN 219 210 	Tappet connection G 1/2	Clamp muff connection G 1/2	50	120	Brass	N 05023.0000
			50	120	Chrome-plated brass	N 05023.0001
			50	120	Steel	N 05023.0002
			50	120	Stainless steel	N 05023.0003
with test-flange SN 219 210 	Tappet connection G 1/2	Clamp muff connection G 1/2	250	120	Brass	N 05022.0000
			400	120	Steel	N 05022.0002
			400	120	Stainless steel	N 05023.0003

UK/2009-09-30 This data sheet may only be reproduced in full.